

M772SH-TB Series

10BB HALF-CELL Bifacial Monocrystalline PERC PV Module

530-555W

POWER RANGE

21.48%

MAXIMUM EFFICIENCY

0.55%

YEARLY DEGRADATION


25 25 YEAR PRODUCT WARRANTY

25 25 YEAR OUTPUT GUARANTEE



ISO 9001: Quality Management System

*As there are different certification requirements in different markets, please contact your local sunmac solar sales representative for the specific certificates applicable to the products in the region in which the products are to be used.

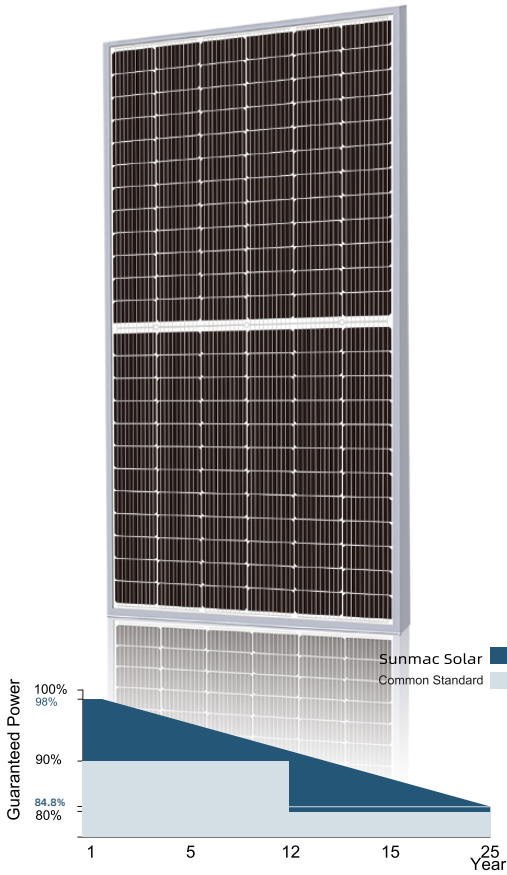

*Please check the valid version of Limited Product Warranty which is officially released by WYONE TRADING, INC.

Key Features



Excellent Cell Efficiency

MBB technology reduces the distance between busbars and finger grid lines which increases power output.



Better Weak Illumination Response

More power output in weak light conditions, such as hazy or cloudy skies and early morning sunlight.



Anti PID

Ensured PID resistance through the quality control of cell manufacturing processes and sourcing of raw materials.



Adapt To Harsh Outdoor Environment

Resistant to harsh environments such as salt, ammonia, sand, high temperatures and high humidity environments.



Bifacial Technology


Up to 25% backside power gain, depending on albedo.




Excellent Quality Management System

Warranted reliability and stringent quality assurance processes are well beyond certified requirements.


DIMENSIONS OF PV MODULE (mm)

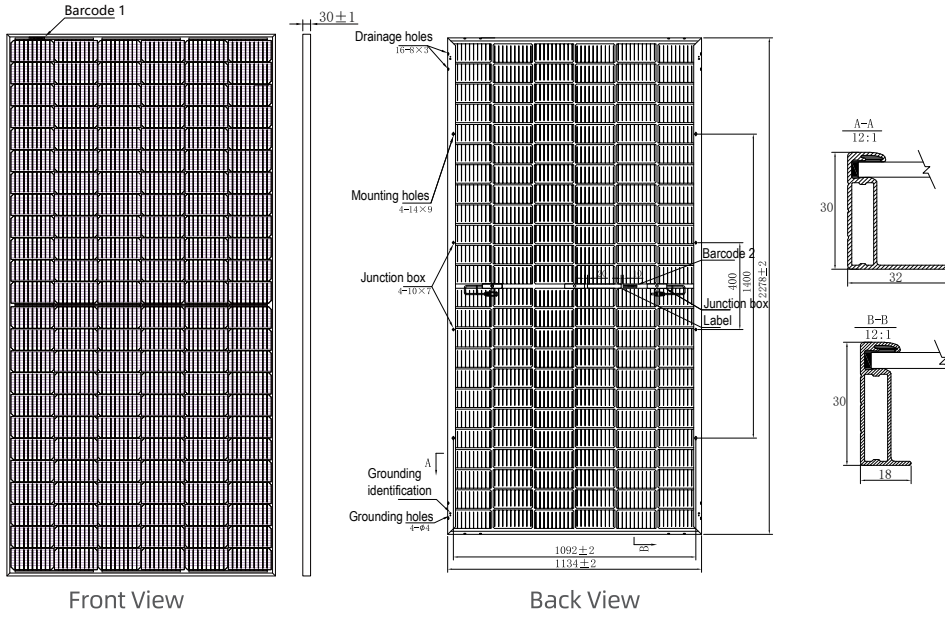

I-V CURVES OF PV MODULE (440W)

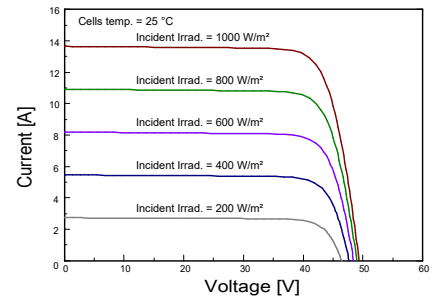

P-V CURVES OF PV MODULE (440W)

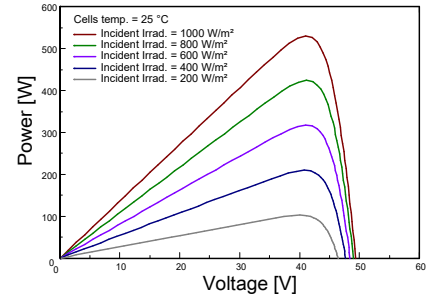

* Remark: customized frame color and cable length available upon request

ELECTRICAL CHARACTERISTICS | STC*

Nominal Power Watt Pmax(W)*	530	535	540	545	550	555
Maximum Power Voltage Vmp(V)	41.10	41.30	41.50	41.70	41.90	42.10
Maximum Power Current Imp(A)	12.91	12.96	13.02	13.07	13.13	13.19
Open Circuit Voltage Voc(V)	49.40	49.60	49.80	50.00	50.20	50.40
Short Circuit Current Isc(A)	13.65	13.71	13.77	13.83	13.89	13.95
Module Efficiency (%)	20.52	20.71	20.90	21.10	21.29	21.48

* The data above is for reference only and the actual data is in accordance with the practical testing
 * STC (Standard Test Condition): Irradiance 1000W/m², Module Temperature 25±2°C, AM 1.5
 * Measuring uncertainty: ±3%, all the electrical characteristics such as Power, Im, Vm and FF are within ±3% tolerance.

MECHANICAL DATA

Solar cells	Mono PERC
Cells orientation	144 (6×24)
Module dimension	2278×1134×30 mm (With Frame)
Weight	25.5±1.0 kg
Glass	3.2mm, High Transmission, AR Coated Heat Strengthened Glass
Junction box	IP 68, 3 diodes
Cables	4 mm², 350 mm or Customized Length
Connectors*	MC4-compatible

* Please refer to regional datasheet for specified connector

ELECTRICAL CHARACTERISTICS | NMOT*

Maximum Power Pmax(Wp)	396.40	399.90	403.60	406.80	410.80	414.60
Maximum Power Voltage Vmpp(V)	38.20	38.40	38.50	38.80	38.90	39.10
Maximum Power Current Impp(A)	10.38	10.42	10.47	10.49	10.56	10.61
Open Circuit Voltage Voc(V)	46.20	46.30	46.50	46.70	46.90	47.10
Short Circuit Current Isc(A)	11.02	11.07	11.12	11.17	11.22	11.27

* NMOT: Irradiance 800W/m², Ambient Temperature 20°C, AM 1.5, Wind Speed 1m/s

TEMPERATURE RATINGS

NMOT	44°C ±2°C
Temperature coefficient of Pmax	-0.35%/°C
Temperature coefficient of Voc	-0.29%/°C
Temperature coefficient of Isc	0.05%/°C
Refer. Bifacial Factor	70±5%

WORKING CONDITIONS

Maximum system voltage	1500 V DC
Operating temperature	-40°C~+85°C
Maximum series fuse	30 A
Front Side Maximum Static Loading	Up to 5400Pa
Rear Side Maximum Static Loading	Up to 2400Pa

* Remark: Do not connect Fuse in Combiner Box with two or more strings in parallel connection

ELECTRICAL CHARACTERISTICS WITH 25% REAR SIDE POWER GAIN*

Front power Pmax/W	530	535	540	545	550	555
Total power Pmax/W	663	669	675	681	688	694
Vmp/V(Total)	41.20	41.40	41.60	41.80	42.00	42.20
Imp/A(Total)	16.08	16.15	16.23	16.30	16.37	16.44
Voc/V(Total)	49.50	49.70	49.90	50.10	50.30	50.50
Isc/A(Total)	17.02	17.10	17.17	17.25	17.32	17.39

* Bifacial Gain: The additional gain from the back side compared to the power of the front side at the standard test condition. It depends on mounting (structure, height, tilt angle etc.) and albedo of the ground.

PACKAGING CONFIGURATION*

Container	40'HQ
Piece/Box	36
Piece	720
Piece(with additional small package)	/

* Customized packaging is available upon request.
 * Remark: Electrical data in this catalog do not refer to a single module and they are not part of the offer. They only serve for comparison among different module types.
 * Caution: Please be kindly advised that PV modules should be handled and installed by trained professional skills and please carefully read the safety and installation instructions before using our PV modules.